

## INTRODUCTORY REMARKS

Mobile Oil, Gas and Drilling Platforms are not normally listed.

Lights are ascribed to a coastal state purely to indicate to the mariner where to look for the feature. This publication is not an authority on either the ownership of lights or sovereignty of the features on which they are constructed.

The date to which this publication has been amended will be found on the title page. The more important amendments to lights are issued as Notices to Mariners for the updating of charts, *but it is emphasised that many alterations to lights, especially those of a temporary but operational nature* are promulgated **only** as amendments to the List of Lights.

## INTERNATIONAL NUMBERS OF LIGHTS

The numbers assigned to lights in Admiralty List of Lights, prefixed by the Volume letter, are the International Numbers, in accordance with the resolutions of the International Hydrographic Organisation.

**These letter-figure combinations should be quoted whenever lights are referred to.**

## GENERAL INFORMATION

The duration of light and darkness are those for which the apparatus was designed. In practice they are subject to some degree of fluctuation, due to slight variations in the working speed of the apparatus. The duration of a flash may also appear to be less than normal when seen from a great distance, and haze has the same apparent effect.

The limits of sectors and of arcs of visibility, and the alignment of direction lights and leading lights are given **as seen by an observer from seaward. All bearings refer to the true compass and are measured clockwise from 000 to 359.**

Racons and Ramarks are included in the List of Lights when they are situated at a light station. For details of Coast Radio Stations and Radar Stations, reference must be made to the relevant volume of the Admiralty List of Radio Signals.

Weather, ice, storm, danger, tide, tidal stream, traffic and port signals may be mentioned when they are shown at a light station but full details will be found in the relevant Admiralty Sailing Directions.

## EXPLANATION—LIGHTS

The character of a rhythmic light is quick flashing, flashing, isophase or occulting, solely according to the relative durations of light and darkness, and without any reference to the type of apparatus employed. At short distances, and in clear weather, flashing lights may show a faint continuous light.

Lights with differing intensity may appear to change their character at different distances because a part of the character may not be visible. Lights exhibiting a very short flash may not be visible at the range calculated from the Luminous Range Diagram (refer to pages 130-131).

Meteorological visibility is the greatest distance at which a black object of suitable dimensions can be seen and recognised against the horizon sky, or, in the case of night observations, could be seen and recognised if the general illumination were raised to the normal daylight level.

Luminous intensity—The luminous flux leaving a light source, in a given direction, usually expressed as candlepower in candelas.

Some lights change colour in sectors, some change character, and a few change both colour and character. Others show different colours in succession.

Rhythmic lights produced by rotating apparatus may be detected at ranges greater than the geographical range by the appearance of the loom of the light.

**Aeromarine lights** are marine-type lights in which a part of the beam is deflected to an angle of 10°–15° above the horizon for the use of aircraft.

**Aero lights** are often of great intensity and elevation. Their intensity is usually greater than that of most navigational lights and they may be the first lights, or looms of lights, to be sighted when approaching the land. Those likely to be visible from seaward are inserted in the List of Lights; their character is always preceded by the word “Aero”. These lights are not designed for marine navigation and they are subject to changes of which prompt notification to the mariner may not always be possible. The details of the lights may not be complete and this information should be treated with caution.

**Obstruction lights** mark radio towers, chimneys and other obstructions to aircraft. Like aero lights, they are not maintained for marine navigation, and the same cautionary remarks apply. They are usually *red* in colour, either *fixed*, *flashing* or *occulting*, but other colours and characters may be employed.

Obstruction lights of high intensity and likely to be visible from seaward are listed with the character preceded by the word “Aero” in column 4 and with the legend “**Obstruction**” in column 8.

**Daytime lights.**—Lights shown throughout 24 hours without change of character are annotated “Shown 24 hours” in column 8 and during daylight, their intensity may be increased. If, by day, there are any differences to their character, elevation, range or arc of visibility during daylight, such differences are shown as a subsidiary entry to the light preceded by the words “*By day*” in column 4.

**Cautionary Notes.**—Where ice conditions are prevalent the windows of lights may be covered with frost or ice, which will greatly reduce the sighting range.

Lights placed at a great elevation are more frequently obscured by cloud, etc., than those near sea level.

The distance of an observer from a light cannot be estimated from its apparent brightness.

The distance at which lights are sighted varies greatly with atmospheric conditions and this distance may be increased by abnormal atmospheric refraction. It will be reduced by fog, haze, dust, smoke or precipitation; a light of low intensity is easily obscured by any of these conditions and the sighting range of even a light of very high intensity is considerably reduced in such conditions. For this reason the intensity or nominal range of a light should always be considered when estimating the range at which it may be sighted, bearing in mind that varying atmospheric conditions may exist between the observer and the light. See “Luminous Range Diagram” and “Geographical Range Table”, pages 130 – 133.

The limits of sectors should not be relied upon; they are those for which the apparatus was designed and they should invariably be checked by compass bearing.

The limits of an arc of visibility are rarely clear cut, especially at a short distance, and instead of disappearing suddenly the light usually fades after the limit of the sector has been crossed.

At the boundary of sectors of different colour there is usually a small arc in which the light may be either obscured, indeterminate in colour, or *white*.

A light apparatus may be encountered where sector boundaries are defined with far greater accuracy than can be achieved with older sector lights.

In cold weather, and more particularly with rapid changes of weather, the lantern glass and screens are often covered with moisture, frost or snow; the sector of uncertainty is then considerably increased in width and coloured sectors may appear more or less *white*. The effect is greatest in *green* sectors and with weak lights. Under these conditions *white* sectors tend to extend into coloured and obscured sectors, and fixed or occulting lights into flashing ones.

*White* lights may have a *reddish* hue under some atmospheric conditions.

When a light is cut off by sloping land the bearing on which the light will disappear will vary with distance and the observer’s height of eye.

## NOMENCLATURE OF LIGHTS

A light must, on a given bearing, maintain a consistent character.

Lights exhibit a distinctive appearance by which they are recognised, e.g. Fixed, Flashing, etc. Those properties of their appearance by which they are distinguished are referred to as the **Character or Characteristics** of the light. The principal characteristics are generally the sequence of intervals of light and darkness exhibited and in some cases the sequence of colours of light exhibited. Lights which are exhibited without interruption or change of characteristics are called **Fixed lights**.

Normally, all lights other than fixed lights exhibit a sequence of intervals of light and darkness, the whole sequence being repeated identically at regular intervals. Such lights are called **Rhythmic lights**, and the time taken to exhibit one complete sequence is called the **Period** of the light. Each element of the sequence (e.g. a flash, an eclipse) is called a **Phase**.

Rhythmic lights which exhibit different colours during each sequence are called **Alternating lights**. The period of an alternating light is the time taken to exhibit the complete sequence, including all changes of colour.

The **intensity** of lights may be given in candelas in *italics*, in Column 4.

**Elevation** is the vertical distance between the focal plane of the light and the level of Mean High Water Springs or Mean Higher High Water, whichever is given in Admiralty Tide Tables. However, *charted* elevations of lights are sometimes referred to Mean Sea Level but the height datum is always clearly annotated on all nautical charts. For vertical lights, e.g. 2 F R(vert), the elevation listed is for the uppermost light.

**RANGE.—Luminous range** is the maximum distance at which a light can be seen at a given time, as determined by the intensity of the light and the meteorological visibility prevailing at that time; it takes no account of elevation, observer’s height of eye or the curvature of the earth. See “Luminous Range Diagram”, pages 130-131.

**Nominal range** is the luminous range when the meteorological visibility is 10 sea miles.

The ranges included in the List of Lights are those published by the competent authority.

**Geographical range** is the maximum distance at which light from a light can theoretically reach an observer, as limited only by the curvature of the earth and the refraction of the atmosphere, and by the elevation of the light and the height of eye of the observer. See “Geographical Range Table” on pages 132-133.

**Loom.** —The diffused glow observed from a light below the horizon or hidden by an obstacle, due to atmospheric scattering.

**Main light.**—The major of two or more lights situated on the same support or neighbouring supports.

**Subsidiary (auxiliary) light.**—A light placed on or near the support of a main light and having a special use in navigation.

**Sector light.**—A light presenting different appearances, either of colour or character, over various parts of the horizon of interest to maritime navigation. Where no sector limits or arcs of visibility are listed in column 8, then the light is assumed to be visible all around.

**Leading lights.**—Two or more lights associated so as to form a leading line to be followed.

Lights described as “Lts in line” are particular cases, and are intended to mark limits of areas, alignments of cables, alignments for anchoring, etc.; they do not mark a direction to be followed.

**Direction light.**—A light showing over a very narrow sector, forming a single leading light. This sector may be flanked by sectors of greatly reduced intensity, or by sectors of different colours or character.

Direction lights are also used to mark the limits of areas, etc., in the same way as “Lts in line”; see preceding paragraph.

**Vertical lights.**—Two or more lights disposed vertically (or horizontally, or in a geometric shape) to give a different character or appearance. If the individual lights serve different purposes, the less important are termed auxiliary lights.

**Description of structures.**—Where the colour divisions of a structure, or any part of it, are horizontal, the term “bands” is used; where vertical, “stripes”; and where the marking is in the form of a spiral, “diagonal stripes” is employed. The shape of topmarks and daymarks is often shown diagrammatically; e.g. “White  $\square$  on beacon” or “Red  $\circ$  on mast”. Such symbols never refer to the plan cross-section of a structure.

The **height** is measured from the top of the structure to the ground.

## FOG SIGNALS

Sound is conveyed in a very capricious way through the atmosphere and the following points should be borne in mind:—

- (a) Fog signals are heard at greatly varying distances.
- (b) Under certain atmospheric conditions, if a fog signal is a combination of high and low tones, one of the tones may be inaudible.
- (c) There are occasionally areas around a station in which the fog signal is wholly inaudible.
- (d) Fog may exist a short distance from a station and not be observable from it, so that the signal may not be sounded.
- (e) Some fog signal emitters cannot be started immediately signs of fog are observed.

Mariners are therefore warned that fog signals should never be relied upon implicitly. Particular attention should be given to placing look-outs in positions in which the noises in the ship are least likely to interfere with the hearing of a fog signal; experience shows that, though such a signal may not be heard from the deck or bridge when the engines are moving, it may be heard when the ship is stopped, or from a quiet position.

Fog signal emitters of all types vary greatly in power; reserve emitters are often especially weak.

Some fog signal emitters sound characters composed of separate blasts of two or more different pitches; these are annotated, in column 8, “2-tone”, “3-tone”, etc. Other emitters commence with an ascending pitch, or conclude with a descending pitch, and are annotated accordingly; others which produce a continuously-varying pitch are annotated “warble tone”.

**Fog signals** are mainly produced by the following types of emitters:—

The *Diaphone* uses compressed air and *generally* emits a powerful, low-pitched sound, which often concludes with a brief sound of suddenly lowered pitch termed the “grunt”. Where it is known that the sound does not terminate in a “grunt”, the signal is annotated “No grunt”.

The *Horn* uses compressed air or electricity to vibrate a diaphragm and exists in a variety of types which differ greatly in their sound and power; some types, particularly those at major fog signal stations, combine emitter units which simultaneously produce sounds of different pitch; these are often very powerful. Others produce a single steady tone, whilst others vary continuously in pitch.

The *Siren* uses compressed air and exists in a variety of types which differ considerably in their sound and power.

The *Reed* uses compressed air and emits a weak, high-pitched sound; it is particularly weak when hand-operated.


The *Explosive* emitter produces short reports by the firing of explosive charges.

The *Bell*, the *Gong* and the *Whistle* may be operated by machinery, sounding a regular character; by hand, sounding a somewhat irregular character; or by wave action, sounding erratically.

*Morse code fog signals.*—In a similar manner to lights, the abbreviation “Mo” is included in the abridged description of fog signals which consist of one or more characters of the morse code; e.g. Horn Mo(AR), Horn Mo(4) and composite fog signals are described, e.g. Siren(2+3).

## LUMINOUS RANGE DIAGRAM

This diagram gives the approximate range at which a light may be sighted in the prevailing meteorological visibility conditions. The straight line labelled “Perfect Visibility” gives the maximum possible luminous range. *Use of Luminous Range Diagram.* The diagram is entered with the **charted nominal range** of the light. At the point in the diagram where this intersects the appropriate visibility curve the approximate luminous range will be found from the left-hand scale. *Example:* North Cape K3690, charted nominal range 18 miles. Estimated meteorological visibility 20 miles. Approximate range at which light may be sighted is 30 miles.

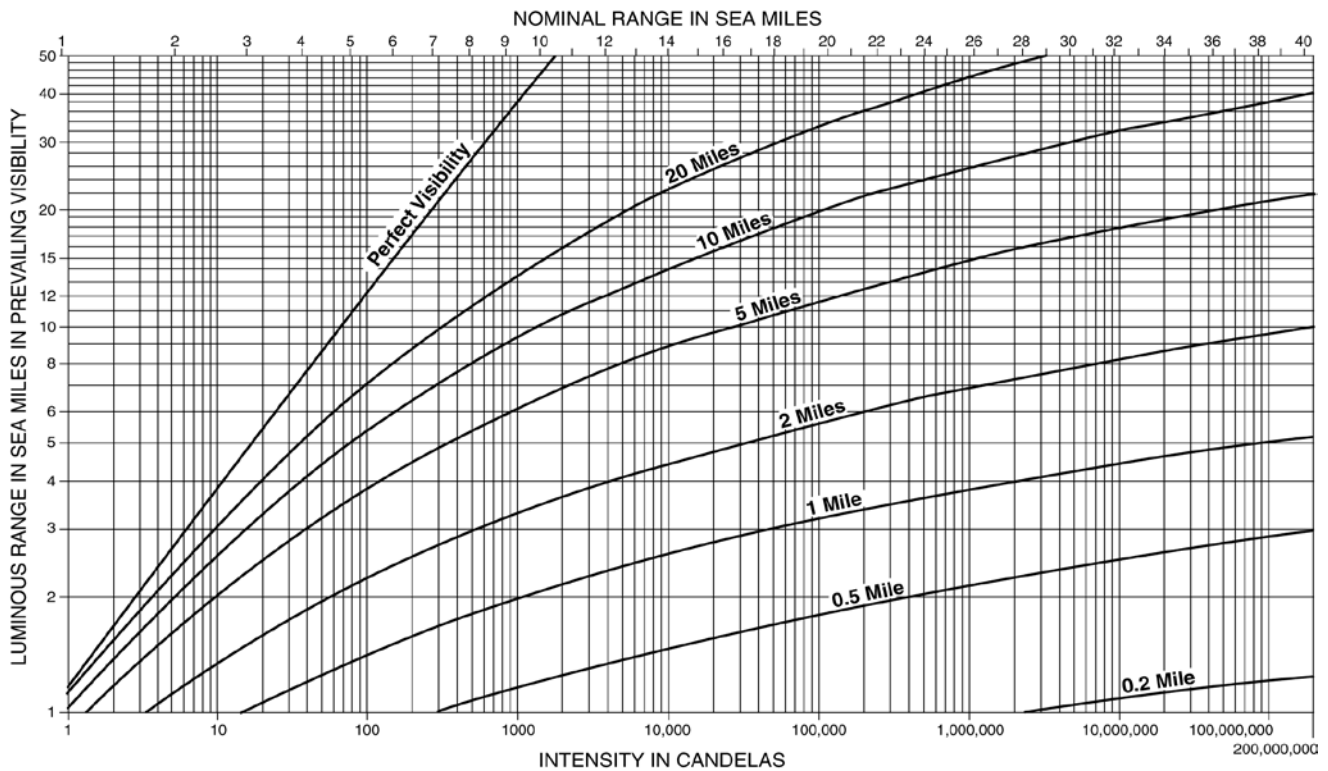

#### CAUTIONS

1. The diagram gives luminous range i.e., the range at which a light may be sighted, irrespective of its elevation and of the observer's height of eye.
2. Ranges are approximate.
3. The transparency of the atmosphere is not necessarily consistent between the observer and the light.
4. Glare from background lighting will reduce considerably the range at which lights are sighted.

#### INTENSITY

The power of a light is normally measured in candelas (cd), the international unit of luminous intensity. However for the purposes of this list, the significant property is not how bright a light is, but how far away it can be seen. Hence the measured intensity values for NZ lights have been converted to the corresponding nominal range figures in nautical miles. The correlation between intensity and nominal range may be seen by comparing the scales along the bottom and top of the Luminous Range Diagram.

#### NOMINAL RANGE

The Nominal Range of the light is the *maximum distance* at which the light can *just* be seen by a *normal observer at night, in conditions* when the actual (or meteorological) visibility is 10 miles.

#### VISIBILITY

Visibility is defined in terms of the distance (meteorological optical range) at which light transmitted is reduced to 5% or 0.05 of the light emitted. For all practical purposes this represents the same atmospheric conditions as for a daytime visibility defined in terms of the maximum distance at which large objects can be recognised. Meteorological visibility at 10 miles corresponds with an atmospheric transmission factor (a.t.f.) of 0.74 per mile;  $0.74^{10} = 0.05$ . For comparison: With an a.t.f. of 0.22 per mile, visibility is 2 miles;  $0.22^2 = 0.05$ . With an a.t.f. of 0.86 per mile, visibility is 20 miles;  $0.86^{20} = 0.05$ .

The atmospheric transmission factor must always be associated with a length unit, and visibility will be in the same unit; e.g. in dense fog with an a.t.f. of 0.74 per **metre**, visibility would be 10 metres. (but note that perfect visibility is an a.t.f. of 1.00 for any length unit.)

#### VISIBLE RANGE

When the visibility is other than 10 miles (it is generally greater in New Zealand) the range at which a light can be expected to be seen can be obtained from the Luminous Range Diagram. It must be noted that neither the charted Nominal Range nor the Luminous Range Diagram take any account of curvature of the earth. The geographical range of a light must be obtained separately from the Geographical Range Table. The above instructions and Luminous Range Diagram are applicable to charted nominal ranges only.

# GEOGRAPHICAL RANGE TABLE

ELEVATION m	HEIGHT OF EYE OF OBSERVER IN METRES																						
	1	2	3	4	5	6	7	8	9	10	12	14	16	18	20	22	24	26	28	30	35	40	45
	<b>RANGE IN SEA MILES</b>																						
0	2.0	2.9	3.5	4.1	4.5	5.0	5.4	5.7	6.1	6.4	7.0	7.6	8.1	8.6	9.1	9.5	10.0	10.4	10.7	11.1	12.0	12.8	13.6
1	4.1	4.9	5.5	6.1	6.6	7.0	7.4	7.8	8.1	8.5	9.1	9.6	10.2	10.6	11.1	11.6	12.0	12.4	12.8	13.2	14.0	14.9	15.7
2	4.9	5.7	6.4	6.9	7.4	7.8	8.2	8.6	9.0	9.3	9.9	10.5	11.0	11.5	12.0	12.4	12.8	13.2	13.6	14.0	14.9	15.7	16.5
3	5.5	6.4	7.0	7.6	8.1	8.5	8.9	9.3	9.6	9.9	10.6	11.1	11.6	12.1	12.6	13.0	13.5	13.9	14.3	14.6	15.5	16.4	17.1
4	6.1	6.9	7.6	8.1	8.6	9.0	9.4	9.8	10.2	10.5	11.1	11.7	12.2	12.7	13.1	13.6	14.0	14.4	14.8	15.2	16.1	16.9	17.7
5	6.6	7.4	8.1	8.6	9.1	9.5	9.9	10.3	10.6	11.0	11.6	12.1	12.7	13.2	13.6	14.1	14.5	14.9	15.3	15.7	16.6	17.4	18.2
6	7.0	7.8	8.5	9.0	9.5	9.9	10.3	10.7	11.1	11.4	12.0	12.6	13.1	13.6	14.1	14.5	14.9	15.3	15.7	16.1	17.0	17.8	18.6
7	7.4	8.2	8.9	9.4	9.9	10.3	10.7	11.1	11.5	11.8	12.4	13.0	13.5	14.0	14.5	14.9	15.3	15.7	16.1	16.5	17.4	18.2	19.0
8	7.8	8.6	9.3	9.8	10.3	10.7	11.1	11.5	11.8	12.2	12.8	13.3	13.9	14.4	14.8	15.3	15.7	16.1	16.5	16.9	17.8	18.6	19.4
9	8.1	9.0	9.6	10.2	10.6	11.1	11.5	11.8	12.2	12.5	13.1	13.7	14.2	14.7	15.2	15.6	16.0	16.4	16.8	17.2	18.1	18.9	19.7
10	8.5	9.3	9.9	10.5	11.0	11.4	11.8	12.2	12.5	12.8	13.5	14.0	14.5	15.0	15.5	15.9	16.4	16.8	17.2	17.5	18.4	19.3	20.0
11	8.8	9.6	10.3	10.8	11.3	11.7	12.1	12.5	12.8	13.2	13.8	14.3	14.9	15.4	15.8	16.3	16.7	17.1	17.5	17.9	18.8	19.6	20.4
12	9.1	9.9	10.6	11.1	11.6	12.0	12.4	12.8	13.1	13.5	14.1	14.6	15.2	15.7	16.1	16.6	17.0	17.4	17.8	18.2	19.1	19.9	20.7
13	9.4	10.2	10.8	11.4	11.9	12.3	12.7	13.1	13.4	13.7	14.4	14.9	15.4	15.9	16.4	16.8	17.3	17.7	18.1	18.4	19.3	20.2	20.9
14	9.6	10.5	11.1	11.7	12.1	12.6	13.0	13.3	13.7	14.0	14.6	15.2	15.7	16.2	16.7	17.1	17.6	18.0	18.3	18.7	19.6	20.4	21.2
15	9.9	10.7	11.4	11.9	12.4	12.8	13.2	13.6	14.0	14.3	14.9	15.5	16.0	16.5	17.0	17.4	17.8	18.2	18.6	19.0	19.9	20.7	21.5
16	10.2	11.0	11.6	12.2	12.7	13.1	13.5	13.9	14.2	14.5	15.2	15.7	16.2	16.7	17.2	17.7	18.1	18.5	18.9	19.2	20.1	21.0	21.7
17	10.4	11.2	11.9	12.4	12.9	13.3	13.7	14.1	14.5	14.8	15.4	16.0	16.5	17.0	17.4	17.9	18.3	18.7	19.1	19.5	20.4	21.2	22.0
18	10.6	11.5	12.1	12.7	13.2	13.6	14.0	14.4	14.7	15.0	15.7	16.2	16.7	17.2	17.7	18.1	18.6	19.0	19.4	19.7	20.6	21.5	22.2
19	10.9	11.7	12.4	12.9	13.4	13.8	14.2	14.6	14.9	15.3	15.9	16.5	17.0	17.5	17.9	18.4	18.8	19.2	19.6	20.0	20.9	21.7	22.5
20	11.1	12.0	12.6	13.1	13.6	14.1	14.5	14.8	15.2	15.5	16.1	16.7	17.2	17.7	18.2	18.6	19.0	19.4	19.8	20.2	21.1	21.9	22.7
22	11.6	12.4	13.0	13.6	14.1	14.5	14.9	15.3	15.6	15.9	16.6	17.1	17.7	18.1	18.6	19.1	19.5	19.9	20.3	20.7	21.5	22.4	23.2
24	12.0	12.8	13.5	14.0	14.5	14.9	15.3	15.7	16.0	16.4	17.0	17.6	18.1	18.6	19.0	19.5	19.9	20.3	20.7	21.1	22.0	22.8	23.6
26	12.4	13.2	13.9	14.4	14.9	15.3	15.7	16.1	16.4	16.8	17.4	18.0	18.5	19.0	19.4	19.9	20.3	20.7	21.1	21.5	22.4	23.2	24.0
28	12.8	13.6	14.3	14.8	15.3	15.7	16.1	16.5	16.8	17.2	17.8	18.3	18.9	19.4	19.8	20.3	20.7	21.1	21.5	21.9	22.8	23.6	24.4
30	13.2	14.0	14.6	15.2	15.7	16.1	16.5	16.9	17.2	17.5	18.2	18.7	19.2	19.7	20.2	20.7	21.1	21.5	21.9	22.2	23.1	24.0	24.7
35	14.0	14.9	15.5	16.1	16.6	17.0	17.4	17.8	18.1	18.4	19.1	19.6	20.1	20.6	21.1	21.5	22.0	22.4	22.8	23.1	24.0	24.9	25.6
40	14.9	15.7	16.4	16.9	17.4	17.8	18.2	18.6	18.9	19.3	19.9	20.4	21.0	21.5	21.9	22.4	22.8	23.2	23.6	24.0	24.9	25.7	26.5
45	15.7	16.5	17.1	17.7	18.2	18.6	19.0	19.4	19.7	20.0	20.7	21.2	21.7	22.2	22.7	23.2	23.6	24.0	24.4	24.7	25.6	26.5	27.2
50	16.4	17.2	17.9	18.4	18.9	19.3	19.7	20.1	20.5	20.8	21.4	22.0	22.5	23.0	23.4	23.9	24.3	24.7	25.1	25.5	26.4	27.2	28.0
55	17.1	17.9	18.6	19.1	19.6	20.0	20.4	20.8	21.2	21.5	22.1	22.7	23.2	23.7	24.1	24.6	25.0	25.4	25.8	26.2	27.1	27.9	28.7
60	17.8	18.6	19.3	19.8	20.3	20.7	21.1	21.5	21.8	22.2	22.8	23.3	23.9	24.3	24.8	25.3	25.7	26.1	26.5	26.9	27.7	28.6	29.4
65	18.4	19.2	19.9	20.4	20.9	21.4	21.7	22.1	22.5	22.8	23.4	24.0	24.5	25.0	25.5	25.9	26.3	26.7	27.1	27.5	28.4	29.2	30.0
70	19.0	19.9	20.5	21.1	21.5	22.0	22.4	22.7	23.1	23.4	24.0	24.6	25.1	25.6	26.1	26.5	26.9	27.4	27.7	28.1	29.0	29.8	30.6
75	19.6	20.5	21.1	21.7	22.1	22.6	23.0	23.3	23.7	24.0	24.6	25.2	25.7	26.2	26.7	27.1	27.5	27.9	28.3	28.7	29.6	30.4	31.2
80	20.2	21.0	21.7	22.2	22.7	23.1	23.5	23.9	24.3	24.6	25.2	25.8	26.3	26.8	27.3	27.7	28.1	28.5	28.9	29.3	30.2	31.0	31.8
85	20.8	21.6	22.2	22.8	23.3	23.7	24.1	24.5	24.8	25.1	25.8	26.3	26.9	27.3	27.8	28.3	28.7	29.1	29.5	29.9	30.7	31.6	32.4
90	21.3	22.1	22.8	23.3	23.8	24.2	24.6	25.0	25.4	25.7	26.3	26.9	27.4	27.9	28.4	28.8	29.2	29.6	30.0	30.4	31.3	32.1	32.9
95	21.8	22.7	23.3	23.9	24.3	24.8	25.2	25.5	25.9	26.2	26.8	27.4	27.9	28.4	28.9	29.3	29.7	30.1	30.5	30.9	31.8	32.6	33.4
100	22.3	23.2	23.8	24.4	24.9	25.3	25.7	26.1	26.4	26.7	27.3	27.9	28.4	28.9	29.4	29.8	30.3	30.7	31.1	31.4	32.3	33.2	33.9
110	23.3	24.2	24.8	25.4	25.8	26.3	26.7	27.0	27.4	27.7	28.3	28.9	29.4	29.9	30.4	30.8	31.3	31.7	32.1	32.4	33.3	34.1	34.9
120	24.3	25.1	25.8	26.3	26.8	27.2	27.6	28.0	28.3	28.7	29.3	29.8	30.4	30.9	31.3	31.8	32.2	32.6	33.0	33.4	34.3	35.1	35.9
130	25.2	26.0	26.7	27.2	27.7	28.1	28.5	28.9	29.2	29.6	30.2	30.8	31.3	31.8	32.2	32.7	33.1	33.5	33.9	34.3	35.2	36.0	36.8
140	26.1	26.9	27.6	28.1	28.6	29.0	29.4	29.8	30.1	30.5	31.1	31.6	32.2	32.6	33.1	33.6	34.0	34.4	34.8	35.2	36.0	36.9	37.7
150	26.9	27.7	28.4	28.9	29.4	29.9	30.2	30.6	31.0	31.3	31.9	32.5	33.0	33.5	34.0	34.4	34.8	35.2	35.6	36.0	36.9	37.7	38.5
160	27.7	28.6	29.2	29.8	30.2	30.7	31.1	31.4	31.8	32.1	32.7	33.3	33.8	34.3	34.8	35.2	35.6	36.0	36.4	36.8	37.7	38.5	39.3
170	28.5	29.4	30.0	30.5	31.0	31.5	31.9	32.2	32.6	32.9	33.5	34.1	34.6	35.1	35.6	36.0	36.4	36.8	37.2	37.6	38.5	39.3	40.1
180	29.3	30.1	30.8	31.3	31.8	32.2	32.6	33.0	33.3	33.7	34.3	34.9	35.4	35.9	36.3	36.8	37.2	37.6	38.0	38.4	39.3	40.1	40.9
190	30.0	30.9	31.5	32.1	32.5	33.0	33.4	33.7	34.1	34.4	35.0	35.6	36.1	36.6	37.1	37.5	37.9	38.4	38.7	39.1	40.0	40.8	41.6
200	30.8	31.6	32.2	32.8	33.3	33.7	34.1	34.5	34.8	35.1	35.8	36.3	36.8	37.3	37.8	38.3	38.7	39.1	39.5	39.8	40.7	41.6	42.3
220	32.2	33.0	33.6	34.2	34.7	35.1	35.5	35.9	36.2	36.5	37.2	37.7	38.3	38.7	39.2	39.7	40.1	40.5	40.9	41.4	42.1	43.0	43.8
240	33.5	34.3	35.0	35.5	36.0	36.4	36.8	37.2	37.6	37.9	38.5	39.1	39.6	40.1	40.4	41.0	41.4	41.8	42.2	42.6	43.5	44.3	45.1
260	34.8	35.6	36.3	36.8	37.3	37.7	38.1	38.5	38.8	39.2	39.8	40.4	40.9	41.4	41.8	42.3	42.7	43.1	43.5	43.9	44.8	45.6	46.4
280	36.0	36.9	37.5	38.0	38.5	39.0	39.4	39.7	40.1	40.4	41.0	41.6	42.1	42.6	43.1	43.5	43.9	44.3	44.7	45.1	46.0	46.8	47.6
300	37.2	38.1	38.7	39.2	39.7	40.2	40.6	40.9	41.3	41.6	42.2	42.8	43.3	43.8	44.3	44.7	45.1	45.5	45.9	46.3	47.2	48.0	48.8
320	38.4	39.2	39.9	40.4	40.9	41.3	41.7	42.1	42.4</														

## USE OF GEOGRAPHICAL RANGE TABLE

**CAUTION:** The geographical range of a light, sometimes referred to as the dipping range, only be used for finding the distance off the light in clear weather when the luminous range is equal to or exceeds the geographical range.

### Definition of geographical range

**The maximum** distance at which light can theoretically reach an observer, as limited only by the curvature of the earth and the refraction of the atmosphere, and by the elevation of the light and the height of eye of the observer.

The **Geographical Range Table** can be used to find the dipping or geographical range of a light as follows:

Enter the table at the top with the observer's height of eye and at the left, in the elevation column, with the height of the light as taken from the chart or the Light List in this publication. The dipping range can then be taken from the body of the table, e.g.

1. Height of eye of observer 9 metres, charted height of light 30 metres. Geographical range = 17.2 miles.
2. Height of eye 3 metres, charted height of light 52 metres. Geographical range = 18.18 miles.

To find out whether a light is of sufficient power to be visible at its extreme range reference must be made to the Light List and to the Luminous Range Diagram. For example, to find whether the following lights will be visible at dipping range to an observer having a height of eye of 8 metres. The estimated meteorological visibility is 20 miles.

- (a) Cape Kidnappers K3992. The Light List gives a nominal range of 8 miles and elevation of light 112 metres. The Geographical Range Table gives a range of 27.2 miles, the Luminous Range Diagram gives a range of 11 miles. This light, therefore, *will not* be visible at its dipping range for this particular observer.
- (b) Castle Point K3994. The Light List gives a nominal range of 26 miles and elevation of light 52 metres. The Geographical Range Table gives a range of 20.38 miles and the Luminous Range Diagram gives a range of 44 miles. This light *will* be visible at its dipping range for this particular observer.

### NOTE:

1. Dipping ranges can only be used in clear weather when the loom of the light is visible before or after the light dips on the horizon.
2. Some lights whose charted range is less than their geographical range may be observed to dip on the horizon in conditions of excellent visibility.
3. Conditions of abnormal refraction may cause the dipping ranges to increase and consequently ranges obtained by this method should be used with caution.

# LIGHT CHARACTERS

CLASS OF LIGHT	CHARACTER	GENERAL DESCRIPTION	ABBREVIATION	ILLUSTRATION
<b>A- FIXED</b>	Fixed	A light showing continuously and steadily.	F W	
<b>B- RHYTHMIC</b>		A rhythmic light is a light showing intermittently with a regular periodicity. The rhythmic character of a light is the regular periodic rhythm presented by the light.		
<b>1 – Occulting and Group occulting</b>		A light in which the total duration of light in a period is longer than the total duration of darkness and the intervals of darkness (eclipses) are usually of equal duration.		
	(a) Occulting	An occulting light in which an eclipse is regularly repeated.	Oc W	
	(b) Group occulting	An occulting light in which a group of eclipses, specified in number, is regularly repeated. The total duration of light in each period may be equal to the total duration of darkness.	Oc(2)W	
	(c) Composite Group occulting	A light similar to a group-occulting light except that successive groups in a period have different numbers of eclipses. The total duration of light in each period may be equal to the total duration of darkness.	Oc(3+4)W	
<b>2- Isophase</b>		A light in which all the durations of light and darkness are clearly equal.	Iso W	
<b>3- Flashing and Group Flashing</b>		A light in which the total duration of light in a period is shorter than the total duration of darkness and the appearances of light (flashes) are usually of equal duration.		
	(a) Flashing	A flashing light in which a flash is regularly repeated (at a rate of less than 50 flashes per minute).	FI W	
	(b) Long flashing	A single-flashing light in which an appearance of light of not less than 2s duration (long flash) is regularly repeated.	LFI W	
		A flashing light in which a group of flashes, specified in number, is regularly repeated.	FI(3)W	
	(d) Composite Group flashing	A light similar to a group-flashing light except that successive groups in a period have different numbers of flashes.	FI(3+2)W	

## LIGHT CHARACTERS

CLASS OF LIGHT	CHARACTER	GENERAL DESCRIPTION	ABBREVIATION	ILLUSTRATION
<b>4– Quick lights</b>		A light in which flashes are repeated at a rate of not less than 50 flashes per minute but less than 80 flashes per minute.		
	(a) Quick	A quick light in which a flash is regularly repeated.	Q W	
	(b) Group quick	A quick light in which a specified group is regularly repeated. <i>See note on page 136</i>	Q(9)W Q(6)+LFI W	
	(c) Interrupted quick	A quick light in which the sequence of flashes is interrupted by regular repeated eclipses of constant and long duration.	IQ W	
<b>5– Very quick lights</b>		A light in which flashes are repeated at a rate of not less than 80 flashes per minute but less than 160 flashes per minute.		
	(a) Very quick	A very quick light in which a flash is regularly repeated.	VQ W	
	(b) Group very quick	A very quick light in which a specified group of flashes is regularly repeated.	VQ(3)W	
(c) Interrupted very quick	A very quick light in which the sequence of flashes is interrupted by regularly repeated eclipses of constant and long duration.	IVQ W		
<b>6– Ultra quick lights</b>		A light in which flashes are repeated at a rate of not less than 160 flashes per minute.		
	(a) Ultra quick	An ultra quick light in which a flash is regularly repeated.	UQ W	
(b) Interrupted ultra quick	An ultra quick light in which the sequence of flashes is interrupted by eclipses of long duration.	IUQ W		
<b>7– Morse Code</b>	Morse Code	A light in which appearances of light of two clearly different durations are grouped to represent a character of characters in the Morse Code.	Mo(K)W	
			Mo(AR)W	
			Mo(4)W	
<b>8– Fixed and Flashing</b>		A light in which a fixed light is combined with a flashing light of higher luminous intensity.		
	(a) Fixed and flashing	A fixed light varied, at regular intervals, by a single flash of higher luminous intensity.	FFI W	
(b) Fixed and group flashing	A fixed light varied, at regular intervals, by a group of two or more flashes of higher luminous intensity.	FFI(2)W		

## LIGHT CHARACTERS

CLASS OF LIGHT	CHARACTER	GENERAL DESCRIPTION	ABBREVIATION	ILLUSTRATION
<b>C- ALTERNATING</b>		A light showing different colours alternately.		
<b>1 – Alternating</b>	Alternating	A continuous steady light which shows a change in colour.	Al WGR	
	(a) Alternating Group flashing	See C1 and B3	AIFI WR	
		(b) Alternating group flashing	See C1 and B3	AIFI RW
<b>3 – Occulting and Group occulting</b>	(a) Alternating occulting	See C1 and B1	AIOc WR	
	(b) Alternating group occulting	See C1 and B1	AIOc WGR	
<b>4 – Fixed and flashing and Fixed and group flashing</b>	(a) Alternating fixed and flashing	See C1, A and B3	AIF W FI R	
			AIF W FI RG	
	(b) Alternating fixed and group flashing	See C1, A and B3	AIF W FI(3)G	
	(c) Alternating fixed and composite group flashing	See C1, A and B3	AIF W FI WRR	

**NOTE:** The group flashing light (6)+LFI W is an exceptional light character reserved for use in IALA Buoyage System to indicate a South Cardinal mark.

### LAYOUT OF COLUMN HEADINGS IN NEW ZEALAND LIST OF LIGHTS

- Column 1: Contains the number of each light.
- Column 2: Location, name.  
Place is printed in CAPITALS.  
The names of lights having a range of 15 miles and over are printed in bold type.
- Column 3: Latitude and longitude are given to two decimal places of a minute where data accuracy permits.
- Column 4: Characteristics.
- Column 5: Elevation in metres.
- Column 6: Range in sea miles, in bold type if 15 miles or more.
- Column 7: Description of structure and its height in metres.
- Column 8: Remarks, including phase, sectors and arcs of visibility.

## ABBREVIATIONS USED IN NEW ZEALAND LIST OF LIGHTS

AHP .....	Above head of passes (in miles)	NNE .....	North Northeast
AIS .....	Automatic Identification System Station	NNW .....	North Northwest
Al .....	Alternating	NW.....	Northwest
<i>bl</i> .....	Blast	Oc.....	Occulting
Bu .....	<i>Blue</i>	Oc(. .).....	Group occulting
<i>CALM</i> .....	Catenary Anchor Leg Mooring	Occas .....	Occasional
Dia .....	Diaphone	<b>(P)</b> .....	Preliminary
Dir Lt.....	Direction Light	PA.....	Position approximate
E .....	East	PEL.....	Port Entry Light
<i>ec</i> .....	Eclipse (phase)	Q.....	Quick flashing
ED.....	Existence Doubtful	R .....	<i>Red</i>
ENE.....	East Northeast	Ra refl .....	Radar reflector
ESE.....	East Southeast	Racon .....	Radar responder beacon
Explos.....	Explosive fog signal	RC .....	Circular radio beacon
F .....	Fixed	Ramark .....	Radar beacon
FFI.....	Fixed and flashing	Ro Bn.....	Radio beacon
FFI(. .).....	Fixed and group flashing	Rot.....	Rotating
Fl.....	Flashing	RTE.....	Radar Target Enhancer
Fl(. .).....	Group flashing	S .....	South
<i>fl</i> .....	Flash (phase)	s.....	Seconds
<i>FP</i> SO .....	Floating Production Storage and Offloading facility	SAR .....	Search and Rescue
<i>FSO</i> .....	Floating Storage and Offloading facility	SBM.....	Single Buoy Mooring
<i>FSU</i> .....	Floating Storage Unit	SE.....	Southeast
G .....	<i>Green</i>	si .....	Silence
GRP .....	Glass Reinforced Plastic	Sig Stn.....	Signal Station
HFPB .....	High Focal Plane Buoy	SPM.....	Single Point Mooring
(hor) .....	Horizontal	SSE.....	South Southeast
I.....	Interrupted	SSW.....	South Southwest
Intens.....	Intensified sector	SV .....	Sodium vapour discharge lamp <i>orange</i> in colour
Irreg .....	Irregular	SW.....	Southwest
Iso.....	Isophase	<b>(T)</b> .....	Temporary
<i>Lanby</i> .....	Large Automatic Navigational Buoy	<i>TALM</i> .....	Taut Anchor Leg Mooring
Lat .....	Latitude	<b>TD</b> .....	Fog signal temporarily discontinued
Ldg Lts .....	Leading Lights	<b>TE</b> .....	Light temporarily extinguished
LED.....	Light Emitting Diode	<b>TR</b> .....	Racon temporarily discontinued
LFI.....	Long flash	Unintens .....	Unintensified sector
Lit.....	Light (no details known)	UQ .....	Ultra quick flashing
Long .....	Longitude	(var).....	Varying
LPG .....	Liquid Petroleum Gas	(vert).....	Vertical
<i>lt</i> .....	Light (phase)	Vi.....	<i>Violet</i>
<i>Lt F</i> .....	Light-float	Vis.....	Visible
Lts in line .....	Lights in line	VQ.....	Very quick flashing
(M).....	Light owned by Maritime New Zealand	W .....	West
M .....	Sea miles	W .....	<i>White</i>
m .....	Metres	Whis.....	Whistle
min.....	Minutes	WNW .....	West Northwest
Mo .....	Morse code light or fog signal	WSW.....	West Southwest
MV .....	Mercury vapour discharge lamp <i>greenish-white</i> in colour	Y .....	<i>Yellow, amber or orange</i>
N.....	North		
NE.....	Northeast		